
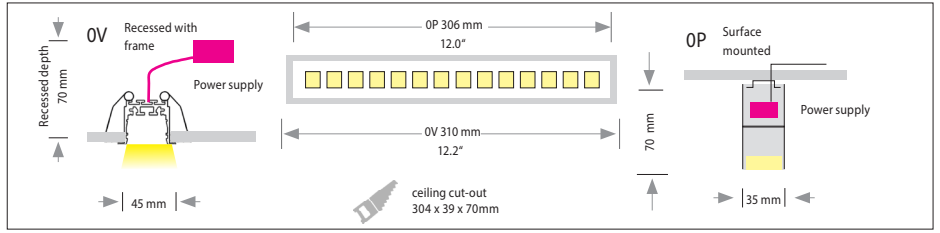


PALADIO DOWNLIGHT

Housing: Aluminium profile with integrated mini lens reflector 60° and power supply
Design: SATTLER

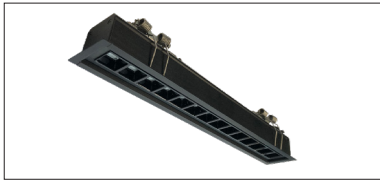

L* x W x H mm	Wattage	Lumen ¹⁾	Lumen / W	Weight ²⁾ kg	Item No.	Mounting version	Finish	LED direct	LED indirect	Dimming	Power supply cable	
300 x 35 x 70	13,9	1.732	124	2,4	2305.	X X.	X X.	X X. X X.	X X. X X.	X X.	X X X.	
*additional 3mm per end cap (OP)												
Mounting version	Recessed with frame	Surface mounted* +6 mm end caps				X X X X.	--.	X X.	X X. X X.	X X. X X.	X X. X X.	X X X.
*only in combination with dimming TRIAC												
Finish	60 silver anodised	Optional	62 black anodised	65 champ. gold anodised	66 bronze anodised	X X X X.	X X.	--.	X X.	X X. X X.	X X. X X.	X X X.
LED direct		LED	Standard: Neutral-white	4000 K	X X X X.	X X.	X X.	40.	X X. X X.	X X. X X.	X X. X X.	X X X.
CRI > 90 MacAdam 3 L 80 B10 72.000 h		Optional:	Extra Warm-white	2700 K	X X X X.	X X.	X X.	27.	X X. X X.	X X. X X.	X X. X X.	X X X.
			Warm-white	3000 K	X X X X.	X X.	X X.	30.	X X. X X.	X X. X X.	X X. X X.	X X X.
			*Tunable white	2700-6500 K	X X X X.	X X.	X X.	80.	X X. X X.	X X. X X.	X X. X X.	X X X.
SELV		DIFFUSER	Standard: Mini lens reflector 60° UGR < 19		X X X X.	X X.	X X.	32.	X X. X X.	X X. X X.	X X. X X.	X X X.
*only in combination with 0V and DALI dimming												
Dimming		Standard: TRIAC			X X X X.	X X.	X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	11. X X X.
		Optional: Dimmable to 1% via DALI, switch Dim			X X X X.	X X.	X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	06. X X X.
		*Casambi			X X X X.	X X.	X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	08. X X X.
*available Q4/2022												
Compatible TRIAC Dimmers												
Manufacturer	Model	Quantity of parallel connection										
JUNG	1224 LED UDE	14										
JUNG	1731 DD	10										
Merten	SBD200LED	13										
ABB Busch-Jaeger	6519 U	15										
ABB Busch-Jaeger	6526 U	13										
Berker	296110	10										
Berker	2973	12										
Schneider	SBD200LED ELG174231	13										
Input voltage 220-240 VAC, 50/60Hz.												

Pieces: Complete order number:

